


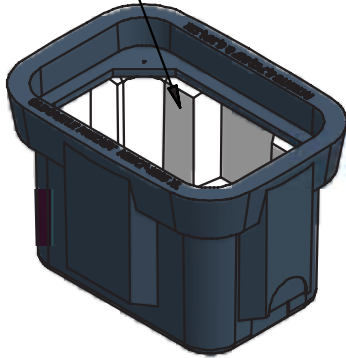


White Interior

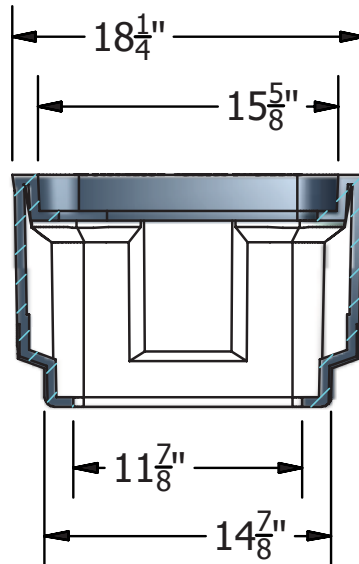

COVER:

Style: Flush
Material: Ductile Iron
Weight: 26.0 lbs.
Options: Logos and Special Markings


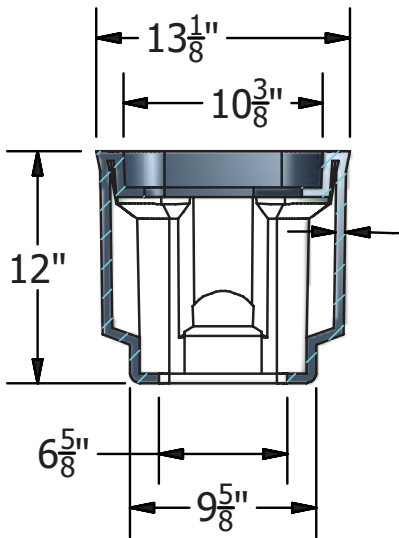


BODY/UNIT:

Material: Polyethylene Blend
Weight: 14.0 lbs
Standard Color: Black with White Interior
Mouseholes: 2

EXTENSION:

Material: Polyethylene Blend
Weight: 7.5 lbs
Standard Color: Black with White Interior

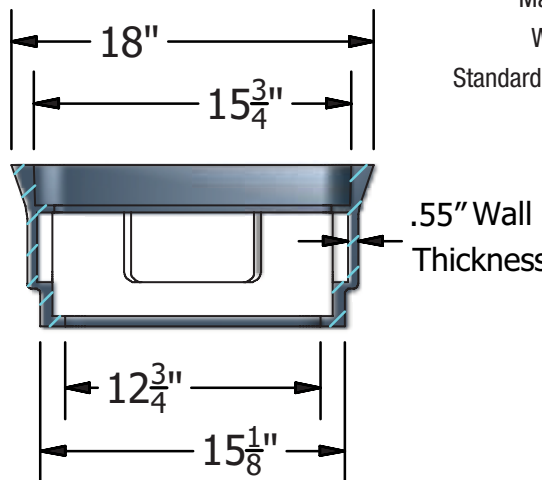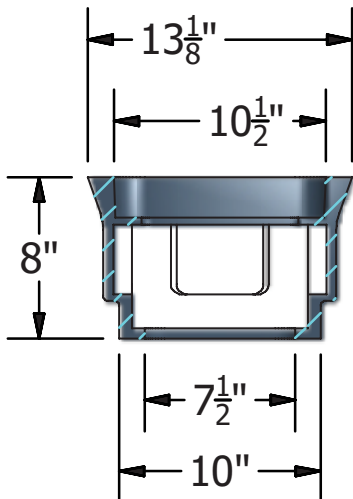

Note:
Actual load rating is determined by
the box and cover combination

Weights and dimensions may
vary slightly

1015 MSBCF

Options: **Available Lightweight Plastic Covers:**

- Flush Solid Cover
- Flush Cover with Plastic Reader Door
- Flush Cover with Cast Iron Reader Door

Available Heavy Duty Plastic Covers:

- Flush Solid Cover

Available Polymer Concrete Covers:


- Flush Solid Cover
- Flush Cover with Cast Iron Reader Door

Available Ductile Iron Covers:


- Flush Solid Cover
- Flush Cover with Cast Iron Reader Door

Add On Options for Covers:

- Touch Read Hole
- ERT Holder (Plastic and Polymer Concrete Only)

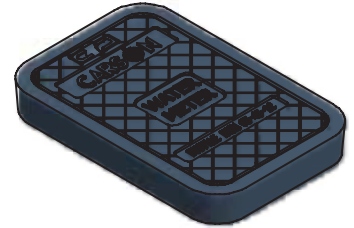

Flush Solid Cover

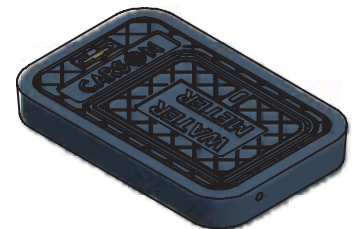

Reader Door Detail

Raw Material Specifications:

- Meter Boxes are high-density Polyethylene, one-piece molded construction
- Wall thickness minimum .550"
- Vertical load rating minimum 15,000 lbs.
- Sidewall loading of 200 lb side load, applied with a 4" X 4" plate.
- Multi-layer wall construction
- Black exterior surface to provide UV protection
- Gray foaming for strength and insulating value
- White interior surface for ease of meter reading
- Manufactured by Oldcastle Precast Enclosure Solutions

Cast Iron Meter Ring and Lid Specifications:

- Made of cast iron conforming to ASTM A48 standards and marked with country of origin
- Coated with a factory applied water based asphalt paint
- Castings are ground smooth and cleaned by shot blasting, uniform quality, free from sand holes, shrinkage, cracks and other surface defects, with a dimensional tolerance of +/- 1/16" per foot based on the accepted foundry tolerances outlined in the Iron Castings Handbook published by the American Foundry Society.

OPES Load Rating Key:


- Light Duty : Pedestrian/Greenbelt
- Medium Duty : Incidental, Non-deliberate Traffic
- Heavy Duty : Incidental, Non-deliberate Traffic
- Traffic : Continuous Roadway Traffic

Note:

Actual load rating is determined by the box and cover combination. Weights and dimensions may vary slightly



All information contained on this sheet is current at the time of printing. Because of Oldcastle Precast, Inc.'s policy of ongoing research and development, the Company reserves the right to discontinue or update product information without notice.

White Interior

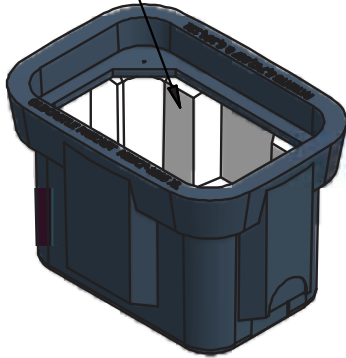

COVER:

Style: Flush
Material: Ductile Iron
Weight: 26.0 lbs.
Options: Logos and Special Markings

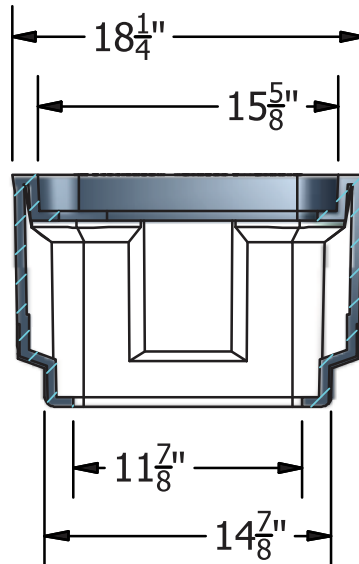
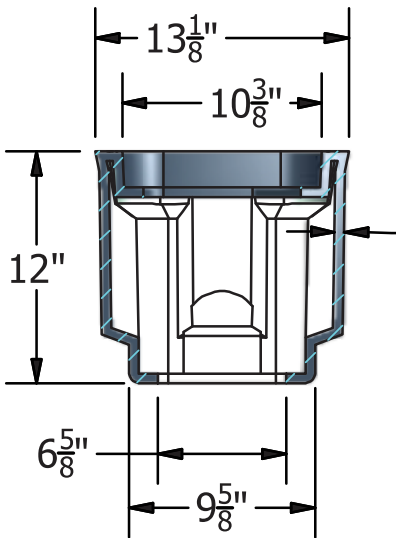


BODY/UNIT:

Material: Polyethylene Blend
Weight: 14.0 lbs
Standard Color: Black with White Interior
Mouseholes: 2

EXTENSION:

Material: Polyethylene Blend
Weight: 7.5 lbs
Standard Color: Black with White Interior

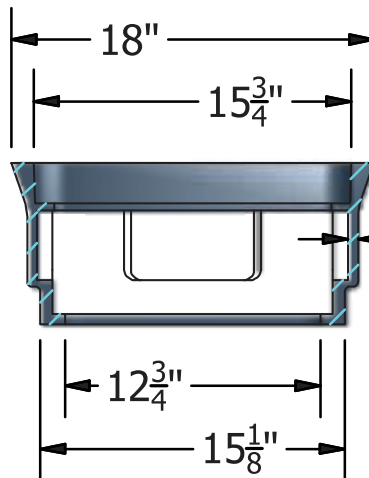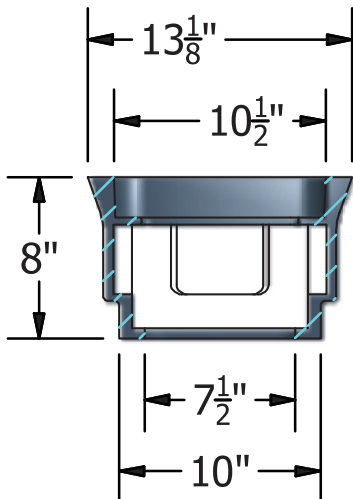

.55" Wall Thickness

Note:
Actual load rating is determined by
the box and cover combination

Weights and dimensions may
vary slightly

1015 MSBCF

Options: **Available Lightweight Plastic Covers:**

- Flush Solid Cover
- Flush Cover with Plastic Reader Door
- Flush Cover with Cast Iron Reader Door

Available Heavy Duty Plastic Covers:

- Flush Solid Cover

Available Polymer Concrete Covers:


- Flush Solid Cover
- Flush Cover with Cast Iron Reader Door

Available Ductile Iron Covers:


- Flush Solid Cover
- Flush Cover with Cast Iron Reader Door

Add On Options for Covers:

- Touch Read Hole
- ERT Holder (Plastic and Polymer Concrete Only)

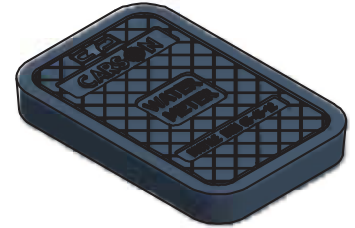

Flush Solid Cover

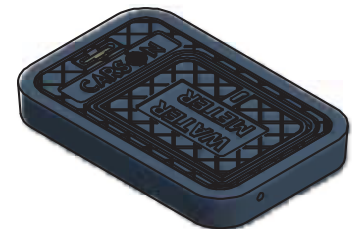

Reader Door Detail

Raw Material Specifications:

- Meter Boxes are high-density Polyethylene, one-piece molded construction
- Wall thickness minimum .550"
- Vertical load rating minimum 15,000 lbs.
- Sidewall loading of 200 lb side load, applied with a 4" X 4" plate.
- Multi-layer wall construction
- Black exterior surface to provide UV protection
- Gray foaming for strength and insulating value
- White interior surface for ease of meter reading
- Manufactured by Oldcastle Precast Enclosure Solutions

Cast Iron Meter Ring and Lid Specifications:

- Made of cast iron conforming to ASTM A48 standards and marked with country of origin
- Coated with a factory applied water based asphalt paint
- Castings are ground smooth and cleaned by shot blasting, uniform quality, free from sand holes, shrinkage, cracks and other surface defects, with a dimensional tolerance of +/- 1/16" per foot based on the accepted foundry tolerances outlined in the Iron Castings Handbook published by the American Foundry Society.

OPES Load Rating Key:

- Light Duty : Pedestrian/Greenbelt
- Medium Duty : Incidental, Non-deliberate Traffic
- Heavy Duty : Incidental, Non-deliberate Traffic
- Traffic : Continuous Roadway Traffic

Note:

Actual load rating is determined by the box and cover combination. Weights and dimensions may vary slightly

All information contained on this sheet is current at the time of printing. Because of Oldcastle Precast, Inc.'s policy of ongoing research and development, the Company reserves the right to discontinue or update product information without notice.